

# General Purpose Solenoid Valves

For Steam and Hot Water Applications



## Parker Jackes-Evans GP Series Solenoid Valves Normally Closed

For Various Applications Including:

- Car Washes
- Commercial Dishwashers
- Hydronic Applications
- Competitive Pricing
- Highest Quality Components
- Replaces ASCO

**AIR, WATER, OIL**


**Maximum Temp. 225°F / 107°C**

Model No.	Part No.	Port Size	Cv	Connections	PSI
GP300	70392	1/2"	3.35	3/8" FPT	1-150
GP400	70562	1/2"	3.35	1/2" FPT	1-150
GP600	70712	3/4"	7.40	3/4" FPT	1-150
GP10A	70810	1"	12.20	1" FPT	1-150

**STEAM**

**Maximum Temp. 300°F / 149°C**

Model No.	Part No.	Port Size	Cv	Connections	PSI
GP357	70394	1/2"	3.35	3/8" FPT	1-50
GP457	70564	1/2"	3.35	1/2" FPT	1-50
GP657	70714	3/4"	7.40	3/4" FPT	1-50
GP1057	70777	1"	12.20	1" FPT	1-50

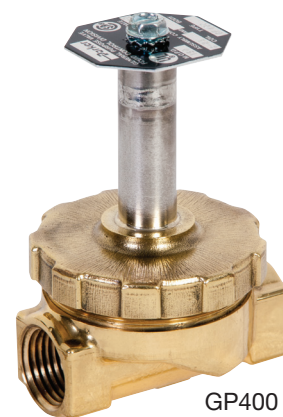

GP400

## GP Series Solenoid Coils (Sold Separately)

**G23 COILS**

**Class "F" Molded**

Model No.	Part No.	Watts	Volts*	Hz	VA Holding	VA Inrush
G23-24V	77300	9	24 VAC	50/60	12	30
G23-120/240	77360	9	120/240 VAC	50/60	12	30

\*G23 coils are available in 12, 24, 120, 208/240, 480, 120/240 VAC and also 12 and 24 VDC. Constructed in accordance with UL, IEEE, and NEMA.



G23 Coil

## Contact Information

Parker Hannifin Corporation  
 Climate and Industrial Controls  
**Air Conditioning and Refrigeration  
 Aftermarket Division**  
 2445 South 25th Avenue  
 Broadview, IL 60155

**phone 800 742 2681**  
**fax 800 241 2872**  
**cicaftermarket@parker.com**  
**www.parker.com**



**ENGINEERING YOUR SUCCESS.**

© 2012 Parker Hannifin Corporation, Form P-361 / 042012